


**TYPE A: LONGITUDINAL SECTION
COMPOSITE PAVEMENT TO HOT MIX PAVEMENT WITH GRANULAR BASE**

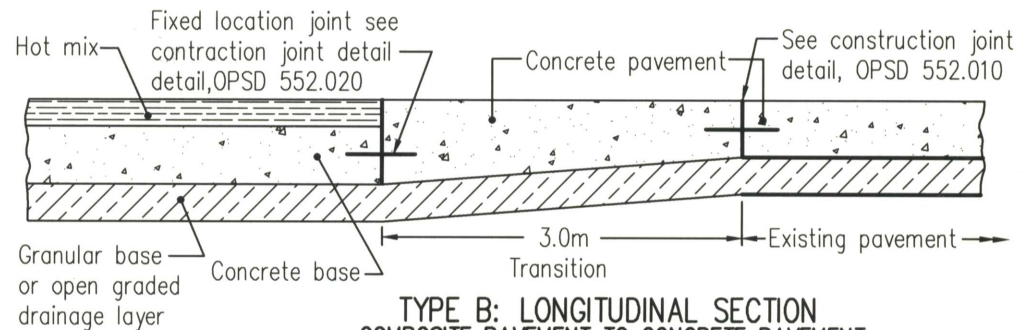

**TYPE B: LONGITUDINAL SECTION
COMPOSITE PAVEMENT TO CONCRETE PAVEMENT**

PLAN VIEW

N.T.S.

GENERAL NOTES:

- 1 ADJUST THE POSITION OF THE LAST JOINT IMMEDIATELY PREVIOUS TO THE FIXED LOCATION JOINT, SO THAT THE SLABS ON EACH SIDE OF THIS LAST JOINT ARE NOT SHORTER THAN 3.0m, NOR LONGER THAN 5.0m. LAST JOINT TO BE AN EXPANSION JOINT FOR TYPE B SECTION.
- A WHEN BASE IS OPEN GRADED DRAINAGE LAYER, A MINIMUM 100mm OF GRANULAR A MATERIAL IS REQUIRED BENEATH IT.
- B ALL CONCRETE SURFACES IN CONTACT WITH HOT MIX PAVEMENT SHALL BE TREATED WITH A TACK COAT PRIOR TO HOT MIX PAVING.
- C ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN.

CITY OF WINDSOR

ENGINEERING DEPARTMENT

**COMPOSITE PAVEMENT
APPROACH TREATMENT TO HOT MIX AND
CONCRETE PAVEMENTS**

DR'N BY: J.L./S.R.

DATE: APRIL, 2014

REVISION: FEB, 2015

CH'KD BY: A.L.

CH'KD BY: P.J.U.

PASSED BY:

[Signature]
CITY ENGINEER

AS-554-B