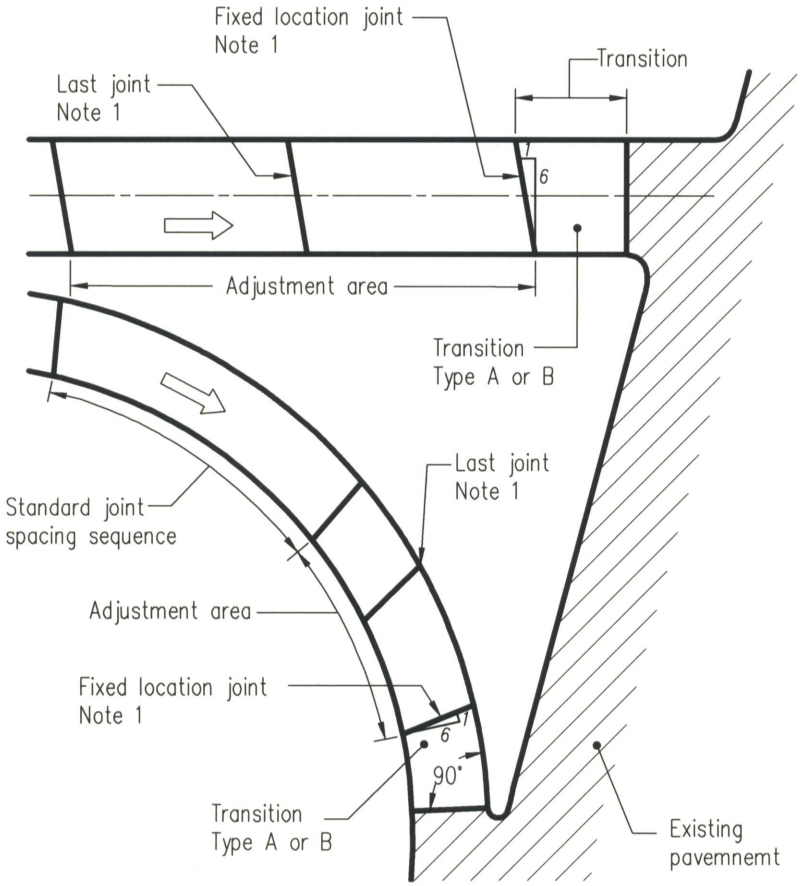


## PLAN VIEW

N.T.S.

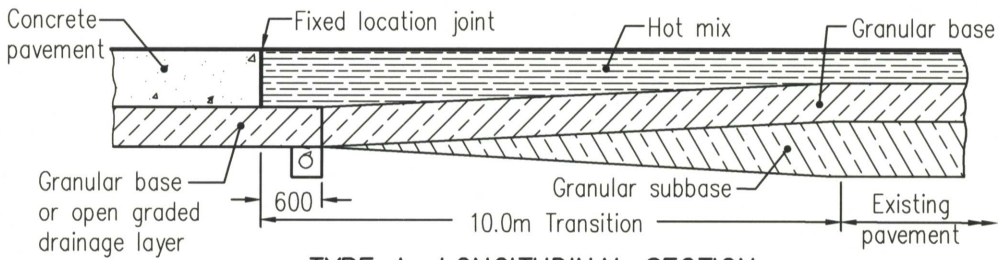


### TYPE A: LONGITUDINAL SECTION
**CONCRETE PAVEMENT TO HOT MIX PAVEMENT WITH GRANULAR BASE**

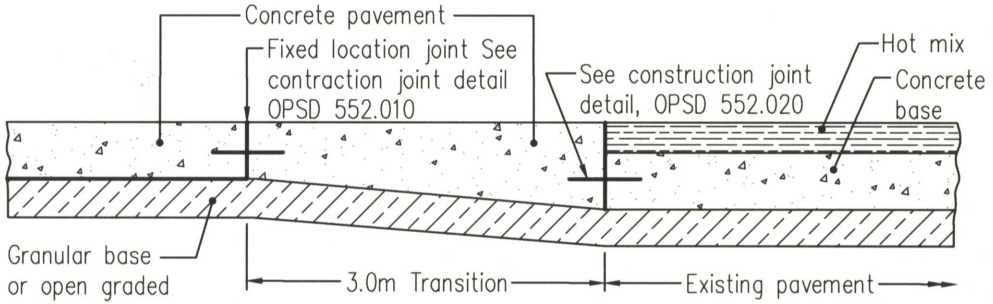


### TYPE B: LONGITUDINAL SECTION
**CONCRETE PAVEMENT TO COMPOSITE PAVEMENT**

## GENERAL NOTES:

1 ADJUST THE POSITION OF THE LAST JOINT IMMEDIATELY PREVIOUS TO THE FIXED LOCATION JOINT, SO THAT THE SLABS ON EACH SIDE OF THIS LAST JOINT ARE NOT SHORTER THAN 3.0m, NOR LONGER THAN 5.0m. LAST JOINT TO BE AN EXPANSION JOINT FOR TYPE B SECTION.

A WHEN BASE IS OPEN GRADED DRAINAGE LAYER, A MINIMUM 100mm OF GRANULAR A MATERIAL IS REQUIRED BENEATH IT.

B ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN.

| CITY OF WINDSOR<br>ENGINEERING DEPARTMENT | |
|---|---|
| **CONCRETE PAVEMENT**<br>**APPROACH TREATMENT TO HOT MIX AND COMPOSITE PAVEMENTS** | |
| DR'N BY: J.L./S.R. | DATE: APRIL, 2014 |
| REVISION: FEB, 2015 | CH'KD BY: A.L. |
| CH'KD BY: P.J.U. | PASSED BY: |
| CITY ENGINEER | AS-554-A |