



**THE CORPORATION OF THE CITY OF WINDSOR
OFFICE OF THE CITY SOLICITOR**

ALEX VUCINIC

Manager of Purchasing

Elaine Castellan

Purchasing Supervisor

(519) 255-6272

TELEPHONE NUMBER

ADDENDUM NO. 1

TENDER NO. 93-19

DOUGALL AVENUE/OUELLETTE PLACE INTERSECTION IMPROVEMENTS

July 23, 2019

This addendum amends and forms part of the Tender Documents. The bidder shall insert the addendum behind the cover page of the Tender Documents.

CONTRACT DRAWINGS

Bidders shall note the following changes/modifications to the Contract Drawings:

a. Sheet R-3 – Typical Utility Road Cross Sections

The revisions to Sheet R-3 are as follows:

- Pavement composition for both the Asphalt Roadway and Asphalt Access Roadway shall be deleted and replaced with 50 mm SP 12.5 FC2, 75 mm SP 19, 450 mm Granular 'A'.

b. Sheets E-1, E-2, & E-3

- Bidders shall replace Sheets E-1, E-2, & E-3 with the attached revision.

UNIT PRICING SCHEDULE

Bidders shall note the following changes/modifications to the Unit Pricing Schedule:

- a. Bidders shall replace “Part D – Traffic Signals and Lighting” in Unit Pricing Schedule with the attached revision.

SPECIFICATIONS

Bidders shall note the following changes/modifications to the Specifications:

- a. Bidders shall replace Special Provision **25.0 – Street Lighting Infrastructure** subsection “e” with the following:

e. Roadway Street Light Luminaires and Mast Arms

OPSS Form 617 shall apply and govern except as amended or extended herein.

The Contractor shall supply and replace existing fixture on EP-3 with new SL-8 (NXT-48M-0-7-2ES-5-GY-3-UL-S-2H-219C)

The Contractor shall supply SL-1 (NXT-24S-0-7-2ES-3-GY-3-UL-S-2H-219C) and EnWin Utilities shall replace existing fixture on EHP-4 with new SL-1.

The Contractor shall supply SL-2 (NXT-24S-0-7-2ES-3-GY-3-UL-S-2H-219C) and EnWin Utilities shall replace existing fixture on EHP-5 with new SL-2.

The Contractor shall supply SL-3 (NXT-24S-0-7-2ES-3-GY-3-UL-S-2H-219C) c/w 3.0m (10ft) mast arm. EnWin Utilities shall install SL-3 and 3.0m mast arm on EHP-6.

Connections for SL-1, SL-2 & SL-3 will be done by EnWin Utilities.

The Contractor shall re-use 3 existing mast arms on TP-1, TP-7 & TP-9 as per the contractor drawings.

The Contractor shall supply and install 2.4m (8ft) mast arm and SL-4, SL-5, SL-6 & SL-7 as per the contract drawings.

Measurement

Measurement for the luminaires and mast arms shall be made on an each basis.

Payment

Payment shall be made at the Unit Price bid in the Unit Pricing Schedule and shall be compensation in full for all labour, equipment and materials required to carry out this work.

Except for the contents of this addendum, all other terms and conditions of this tender remain the same.

END OF ADDENDUM NO. 1

Yours truly,

THE CORPORATION OF THE CITY OF WINDSOR

Elaine Castellan

Elaine Castellan
Purchasing Supervisor

EC/jm

**ADDENDUM NO. 1
TENDER NO. 93-19
DOUGALL AVENUE/OUELLETTE PLACE INTERSECTION IMPROVEMENTS**

July 23, 2019

I hereby acknowledge receipt of Addendum No. 1 to the Tender No. 93-19 (7 pages).

The information contained therein is hereby noted and account of same will be taken in our tender cost.

This information was received on the _____ day of _____, 20_____.

Signature


Name (Printed)

Company Name

***NOTE: You are required to acknowledge this addendum with your TENDER submission.**

**PLEASE FAX BACK TO (519) 255-9891 OR E-MAIL @ purchasing@citywindsor.ca SIGNED
ACKNOWLEDGEMENT SHEET ASAP**

Attn: Purchasing Department

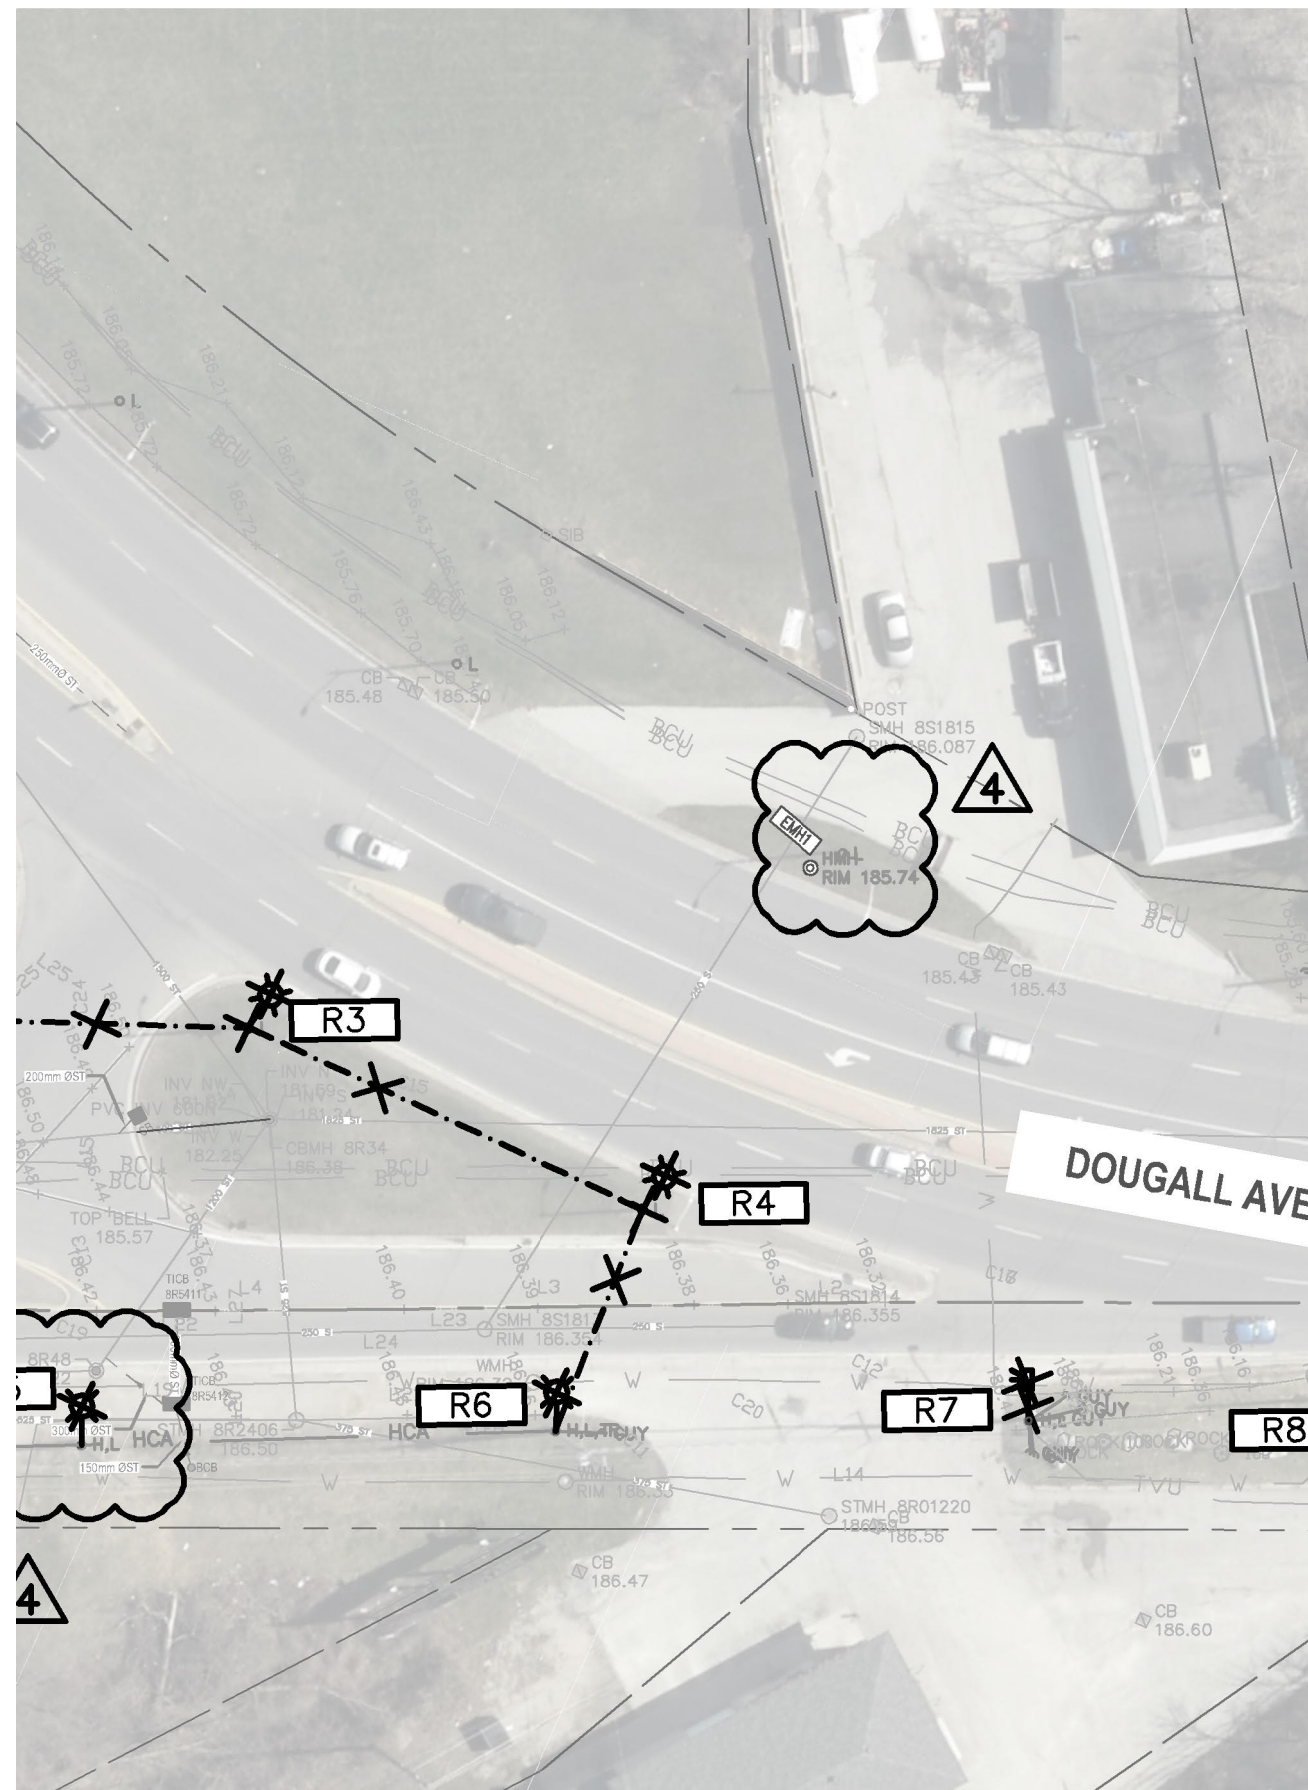

ELECTRICAL REMOVALS

	COMM
	REMOVE AND SALVAGE LUMINAIRE AND RETURN TO THE CITY OF WINDSOR
	REMOVE AND SALVAGE POLE, AND LUMINAIRE AND RETURN THEM TO THE CITY
	REMOVE AND SALVAGE POLE, AND LUMINAIRE AND RETURN THEM TO THE CITY
	REMOVE AND SALVAGE POLE, AND LUMINAIRE AND RETURN THEM TO THE CITY
	REMOVE AND SALVAGE LUMINAIRE AND RETURN TO THE CITY OF WINDSOR
	REMOVE AND SALVAGE LUMINAIRE AND RETURN TO THE CITY OF WINDSOR
	REMOVE AND SALVAGE FLASHING BEACON AND ARM AND RETURN TO THE CITY
	ENWIN TO REMOVE AND SALVAGE THE EXISTING HYDRO POLE, LUMINAIRE AND
	ENWIN TO REMOVE AND SALVAGE THE EXISTING HYDRO POLE, LUMINAIRE AND

		4 ADDENDUM#1
		3 TENDER
		2 TENDER REVIEW
1 CLIENT REVIEW		
No.		

PROJ. NO.	18-8905-1000
SHEET NO.	E-3