




**STANDARD CURB AND GUTTER**

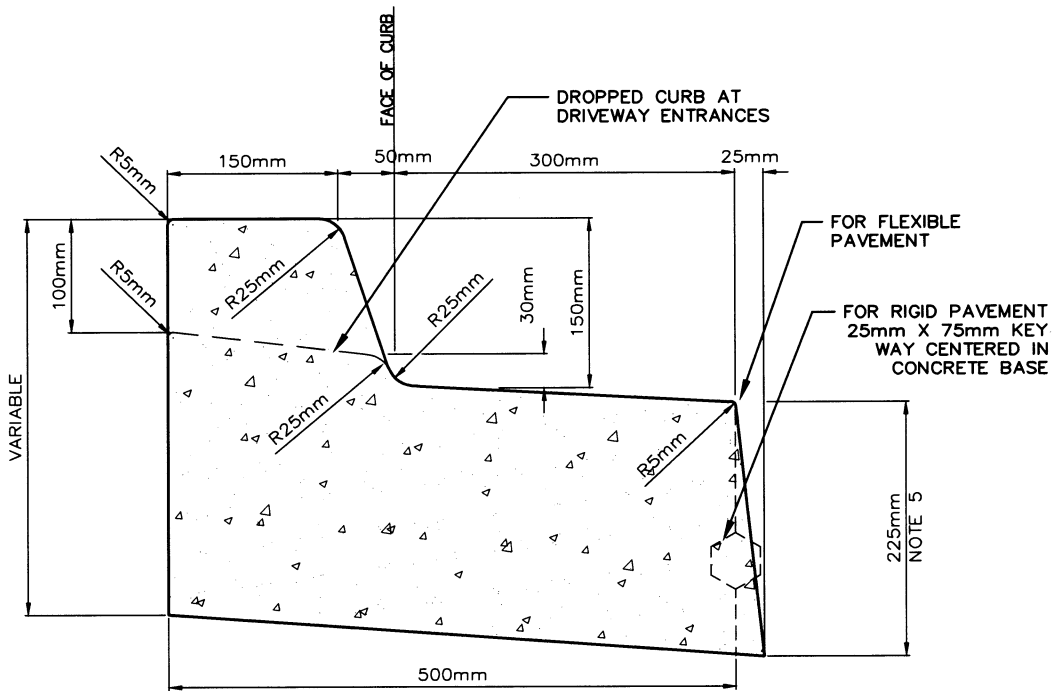

**SUPERELEVATED CURB AND GUTTER**

**GENERAL NOTES:**

1. FILLER MATERIAL SHALL BE 12-20mm THICK PIECE OF FULL DEPTH AND WIDTH OF JOINT MEETING OPSS 1308 (EXCLUDING CORK FILLER)
2. MAXIMUM SPACING OF JOINTS:  
3m ON CIRCULAR SECTION WITH RADIUS LESS THAN 9m; 4.9m ELSEWHERE.
3. CONTRACTION JOINTS FOR ASPHALT SURFACES TO BE SPACED 5m AND COINCIDE WITH THE CONTRACTION JOINTS FOR CONCRETE PAVEMENTS.
4. CROSS FALL OF GUTTER SHALL CONFORM TO PAVEMENT CROSS FALL AT CATCH BASIN.
5. FOR COMPOSITE PAVEMENT THE DEPTH OF CONCRETE CURB SHALL BE ADJUSTED TO THE DEPTH OF CONCRETE PAVEMENT.
6. ALL WORK SHALL CONFORM TO CITY OF WINDSOR SPEC. S-5

 <b>CITY OF WINDSOR</b> ENGINEERING DEPARTMENT	
<b>STANDARD &amp; SUPERELEVATED CURB &amp; GUTTER FOR COLLECTOR &amp; ARTERIAL ROADS</b>	
DR'N BY: L.E.B.	DATE: MARCH 2017
REVISION: S.R.	CH'KD BY: M.C.
CH'KD BY: P.U.	PASSED BY:
 CITY ENGINEER	
<b>AS-208A</b>	