


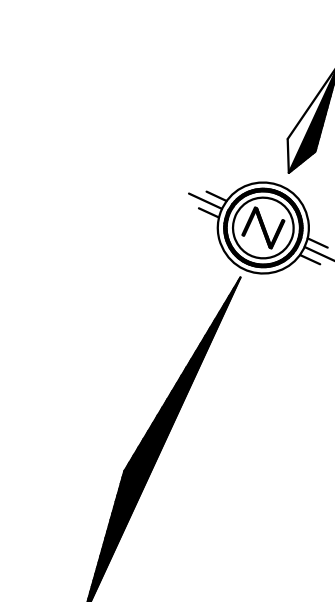

© VERHAEGEN LAND SURVEYORS, A DIVISION OF J.D. BARNES LIMITED

Circumstance	Percentage of respondents who believe that the use of force is justified
Self-defense	~85%
Protection of others	~75%
Protection of property	~65%
Protection of the community	~55%
Protection of the environment	~45%
Protection of the economy	~35%
Protection of the culture	~25%
Protection of the religion	~15%
Protection of the family	~10%
Protection of the individual	~5%

BEARINGS ARE UTM GRID DERIVED FROM OBSERVED REFERENCE POINTS 'A' AND 'B' BY REAL TIME NETWORK OBSERVATIONS AND ARE REFERRED TO UTM ZONE 17 (81° WEST LONGITUDE) NAD83 (CSRS) (2010.0).

DISTANCES ON THIS PLAN ARE GROUND AND CAN BE CONVERTED TO GRID BY MULTIPLYING BY THE COMBINED SCALE FACTOR OF 0.999912.

■	DENOTES	SURVEY MONUMENT FOUND
□	DENOTES	SURVEY MONUMENT SET
SIB	DENOTES	STANDARD IRON BAR
SSIB	DENOTES	SHORT STANDARD IRON BAR

- [illegible]

DECIDUOUS AND CONIFEROUS TREES ARE DENOTED BY AND CT RESPECTIVELY. A PREFIX TO THE DESCRIPTION DESIGNATES THE NUMBER OF TREE TRUNKS WHEN TREES ARE CLUMPED TOGETHER AND A SUFFIX DENOTES THE TREE DIAMETER OR (NTS) NOT TO SCALE.

C	C	C	DENOTES OVERHEAD CABLE TV LINE
G	(pipe size)	G	DENOTES GAS LINE
H	H	H	DENOTES OVERHEAD HYDRO LINE
CS	(pipe size)	CS	DENOTES COMBINED SEWER
SA	(pipe size)	SA	DENOTES SANITARY SEWER
ST	(pipe size)	ST	DENOTES STORM SEWER
T	T	T	DENOTES OVERHEAD TELEPHONE LINE
W	(pipe size)	W	DENOTES WATER LINE

ELEVATIONS SHOWN ON THIS PLAN ARE IN METRES TO CANADIAN GEODETIC VERTICAL DATUM (1928)

BENCH MARK 1114 ELEVATION 185.24
1190 WALKER ROAD; THE PLATE IS LOCATED ON THE WEST WALL, 0.08m FROM
THE SOUTH WALL AND 0.30m ABOVE GRADE

TOP OF FIRE HYDRANT ON ST. LUKE ROAD.

2.9984

COORDINATES ARE DERIVED FROM GRID OBSERVATIONS USING THE CAN-NET NETWORK SERVICE AND ARE REFERRED TO UTM ZONE 17 (81° WEST LONGITUDE) NAD83 (CSRS) (2010.0).
COORDINATE VALUES ARE TO AN URBAN ACCURACY IN ACCORDANCE WITH SECTION 14(2) OREG 216/10

FOR BEARING COMPARISON, A ROTATION OF 01°13'30" CLOCKWISE WAS APPLIED TO (01) AND (03) TO CORRESPOND TO GRID BEARING.

FOR BEARING COMPARISON, A ROTATION OF 01°13'40" CLOCKWISE WAS APPLIED TO

I CERTIFY THAT:

1. THIS SURVEY AND PLAN ARE CORRECT AND IN ACCORDANCE WITH THE SURVEYS AND

2. THIS SURVEY WAS COMPLETED ON THE 5th DAY OF JULY, 2022.

DATE JULY 27, 2022

REVISÉ: OCTOBER 4, 2024

ANDREW S. MANTHA
ONTARIO LAND SURVEYOR



T: (519) 258-1772 F: (519) 258-1791 www.jdbarnes.com		
DRAWN BY: D.J.	CHECKED BY: A.S.M.	REFERENCE NO.: 22-47-276-
CAD File: 22-47-276-01.dwg	E-WND-1-96	CAD Date: October 10, 2024