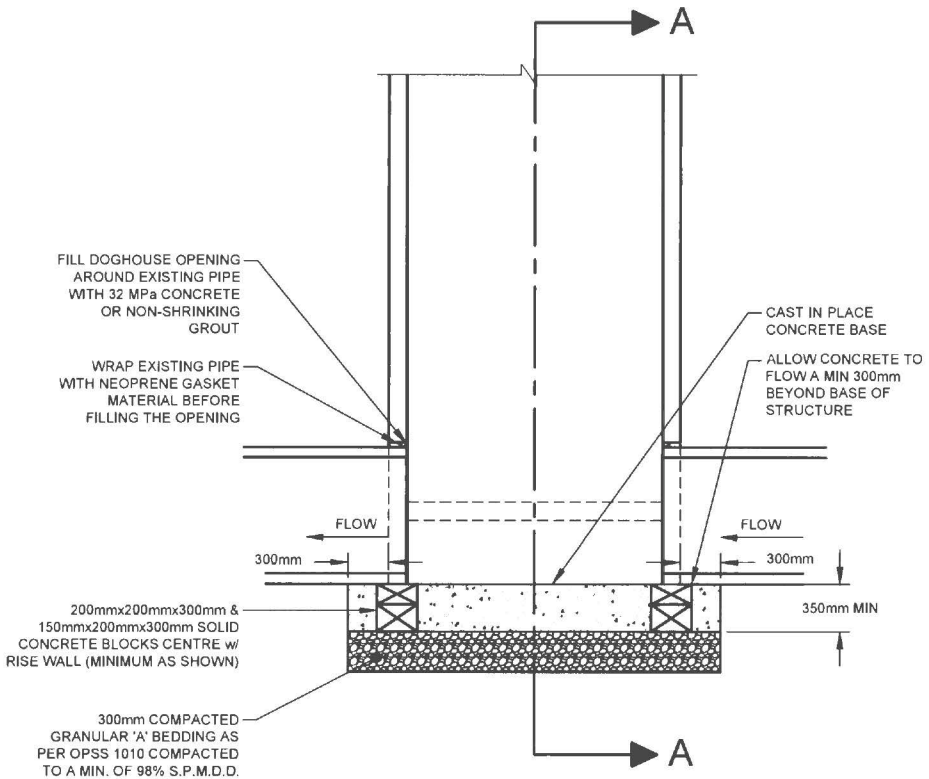

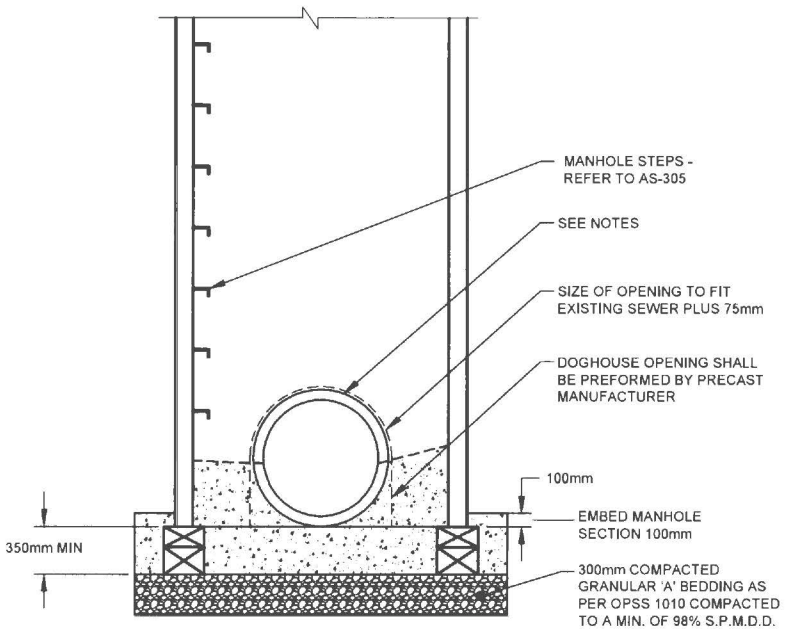

SECTION A-A

NOTES:

1. ALL MAINTENANCE HOLE COMPONENTS TO MEET AS-314.
2. ALL BENCHING IS TO MEET OPSD 701.21
3. ALL CAST IN PLACE CONCRETE TO BE 32 MPa
4. CONCRETE BONDING AGENT MUST BE APPLIED TO ALL INTERFACES OF PRECAST TO CAST-IN-PLACE CONCRETE.
5. TOP OF EXISTING MAINLINE SEWER MUST BE FULLY REMOVED TO SPRINGLINE ACROSS THE FULL INTERNAL WIDTH OF THE STRUCTURE

CITY OF WINDSOR
ENGINEERING DEPARTMENT

DOGHOUSE MANHOLE

DRAWN BY: N.B.	DATE: APRIL 2016
REVISED: –	CHECKED BY: P.U.
CHECKED BY: M.C.	PASSED BY: M.W.

CITY ENGINEER

AS–559